inles® WINDOWS DOORS

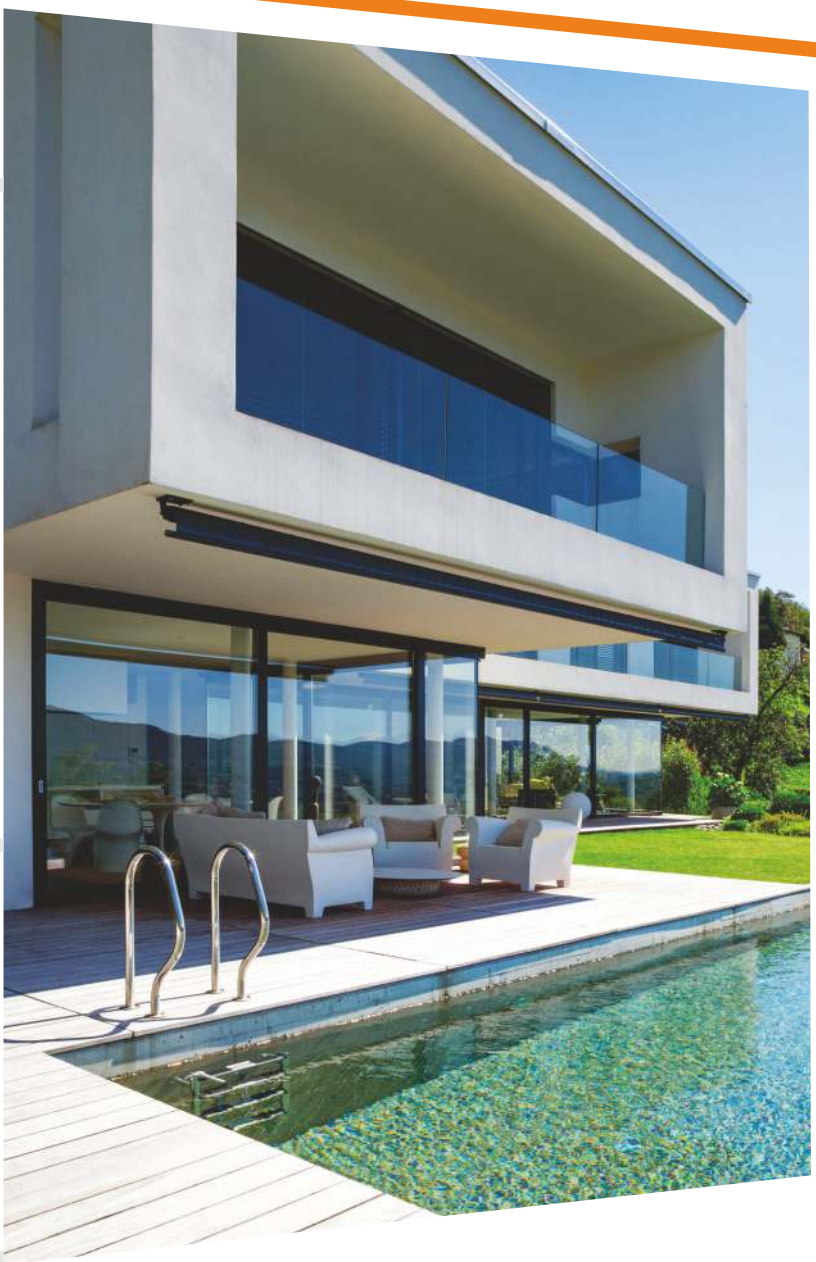

WOOD AND WOOD/ALUMINIUM WINDOWS

Custom wood windows and doors -

- Inles d.d. is a manufacturer of windows and doors with 70 years of experience.
- The legacy of Inles quality is built on hundreds of years of tradition in crafting woods.
- Inles products are known for quality and durability all over Europe. We are also known under the trade mark ISARHOLZ.
- Carefully selected materials and a technologically advanced manufacturing facility guarantee outstanding products for safety, durability, design and comfort.

inles®

- Inles offers only the highest quality windows and doors. We are recognized throughout the world. Most of our products we sell in the EU market and the markets of Asiaa, Africa, north and south America.
- We offer a variety of materials: wood, vinyl, aluminum or any combination of wood/aluminium, pvc/aluminium that will enhance the appearance and quality of your home.
- With Inles you can choose the materials to satisfy your taste.

- Quality and advanced technology for all architectural requirements.

ISARHOLZ®

Wood windows

WOOD WINDOWS

The manufacture of building furniture made of wood has a long-established tradition in our company. Wood as a renewable natural material is an extremely specific material in nature, which requires special attention and knowledge. And it is the experience and knowledge we have acquired over the years that have contributed to the fact that our wood products have become among the most respected at home and abroad. The processing of profiles, the assembly and processing of individual sets takes place using technologically advanced and modern devices, which enable accurate and quality processing, ensuring the complete satisfaction to buyers of our products.

INO - 92
INO - 80
INO - 92/80
INO - 68

92 WOOD WINDOWS

Uf = 0,98 W/m²K
(soft wood)
Uw = 0,72 W/m²K
(Ug=0,5 W/m²K, Swisspacer Ultimate)

INO-92

The energy-saving window is manufactured in a natural and renewable material – wood.

The product is suitable for installation in high-quality LOW-ENERGY buildings.

GLAZING
Thermal insulated glass from 44 to 57 mm thick.
TGI spacer black.

HARDWARE
A high level of safety for the standard hardware with a load-bearing capacity of 150 kg.
The optional installation of concealed hardware.

SEALANT
The colour of the sealant matches the colour of the product surface.

WOOD TYPE
Wood species: spruce, pine, larch, oak and meranti.

WOOD SURFACES
A wide range of Inles glazes and topcoats also according to the RAL colour chart

A PROTECTIVE ALUMINIUM PROFILE
on the bottom casement crossbeam provides weather protection.
Weatherstrip and protective aluminium profiles in various colours.

- two-coloured version interior-exterior
- concealed hardware
- efficient acoustic insulation
- low-energy product
- RAL assembly
- protective aluminium profile on the casement

The image is symbolic.

80 WOOD WINDOWS

Uf = 1,2 W/m²K
(soft wood)
Uw = 0,83 W/m²K
(Ug=0,5 W/m²K, TGI black)

INO-80

A wood window with a modern classic design made in natural renewable material will create a pleasant atmosphere in your building and a natural and homely feeling.

The surface is treated with an environmentally-friendly three-layered coating system by Inles, which increases the durability of products and creates more sophisticated appearance.

GLAZING
Thermal insulated glass with Ug=0.5 W/m²K and TGI spacer black.

HARDWARE
A high level of safety for the standard hardware with a load-bearing capacity of 150 kg.
The optional installation of concealed hardware.

SEALANT
The colour of the sealant matches the colour of the product surface.

WOOD TYPE
Wood species: spruce, pine, larch, oak and meranti.

WOOD SURFACES
A wide range of Inles glazes and topcoats also according to the RAL colour chart

A PROTECTIVE ALUMINIUM PROFILE
on the bottom casement crossbeam provides weather protection.
Weatherstrip and protective aluminium profiles in various colours.

- two-coloured version interior-exterior
- concealed hardware
- efficient acoustic insulation
- low-energy product
- RAL assembly
- three-layered coating system

The image is symbolic.

80 WOOD

INO-92/80

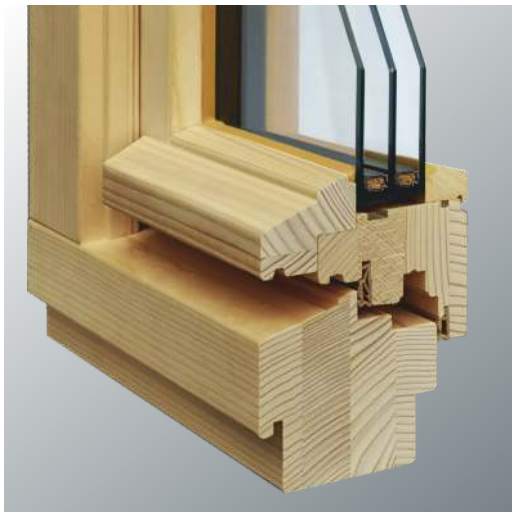

A wood window adapted to special requirements in the renovation of buildings under monument protection.

INO-80 Standard B

A wood window with straight lines and a wood weatherboard.

INO-80 Soft A

Wood window with elegant round lines and a smooth surface will create a sense of comfort in your room. With proper glazing, the thermal transmittance of the complete window can reach 0,83 W/m^2K.

INO-80 Soft B

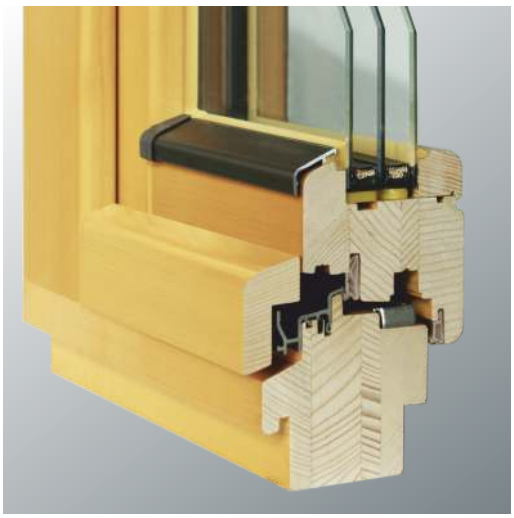

A wood window with soft lines and a weatherstrip profile, covered with a wood bar in a colour that matches the colour of the product, which creates a completely natural appearance from the outside as well.

WINDOWS

INO-80 Stil B

A wood window with a wood weatherboard and sophisticated style, which perfectly matches the architecture of ancient buildings and is also suitable for buildings under heritage protection. You can further enrich the window with decorative elements.

INO-80 Stil A

A wood window with stylish edges from a range of uniquely designed wood products that allow you to match the windows with the equipment of your interior or exterior.

The image is symbolic.

68 WOOD

Uf = 1,5 W/m²K
(soft wood)
Uw = 1,3 W/m²K
(Ug= 1,0 W/m²K, TGI black)

INO-68

A wood window with a modern classic design made in natural renewable material will create a pleasant atmosphere in your building and a natural and homely feeling.

The surface is treated with an environmentally-friendly three-layered coating system by Inles, which increases the durability of products and creates more sophisticated appearance.

The thermal transmittance coefficient of the complete window with the appropriate glazing can be as high as Uw 1,0 W/m²K.

SEALANT
The colour of the sealant matches the colour of the product surface.

HARDWARE
A high level of safety for the standard hardware with a load-bearing capacity of 150 kg.
The optional installation of concealed hardware.

PERMANENT ELASTIC SEALS
Series-mounted highly elastic seals with soft cores and guard backs and smooth surface, resistant to dirt.

PROFILES
wood profiles that are not kongitudinally joined meet the quality requirements of EN 942.

- two-coloured version interior-exterior
- concealed hardware
- efficient acoustic insulation
- low-energy product
- RAL assembly
- three-layered coating system

WINDOWS

INO-68 Stil B

A wood window with a wood weatherboard and sophisticated style, which perfectly matches the architecture of ancient buildings and is also suitable for buildings under heritage protection. You can further enrich the window with decorative elements.

INO-68 Stil A

A wood window with stylish edges from a range of uniquely designed wood products that allow you to match the windows with the equipment of your interior or exterior.

INO-68 Standard B

A wood window with straight lines and a wood weatherboard.

PANORAMIC WINDOWS

By installing the panoramic windows, you will connect your internal atmosphere with the external environment of your building. Large glass surfaces bring more natural light into your home, thus making your living better and more pleasant. They are an ideal choice for people who want a greater transition between rooms and improved use of space.
Inles offers all three panoramic window systems. You can choose from a wide selection of thermal insulation glass with excellent thermal characteristics, which prevents heat loss and also generates the savings in heating costs by keep the warmth in your home.

Sliding-tilting (18)

Lifting-sliding (14)

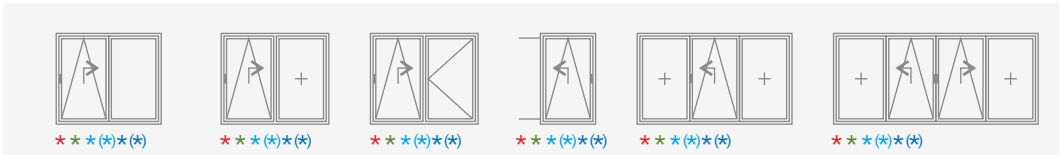

Legend
* Wood
* Wood/Alu
* Vinyl CT70
(*) Vinyl/Alu CT70 Top Alu
* Vinyl Living Slide
(*) Vinyl/Alu Living Slide Top Alu
* Aluminium

folding-articulated

Legend
* Wood (68, 80)
* Wood/Alu
Aluminium (upon request)

We reserve the right to technical modifications or possible errors in the text and printing.

SPECIAL SHAPES

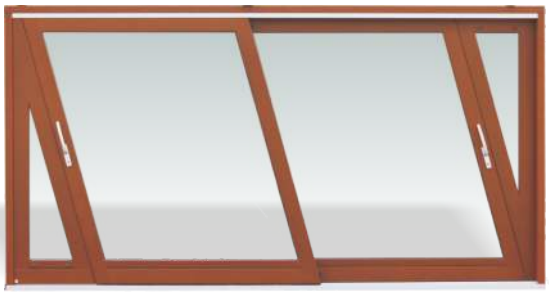

sliding wall with
tilting oblique
casements

round window

arched sliding
wall with arched curved glass

arched window

stylish semi-circular
window with
decorations

triangular window

We reserve the right to technical modifications or possible errors in the text and printing.

PROFILES

- Wood frame profiles and casements with a thickness of 92, 80 and 68 mm meet the constructional requirements of the DIN 68121 standard.
- The profiles are three layers of wood joined together using waterproof D4 adhesive according to the EN 204 and EN 143257 standards.

WOOD

- You can choose from the following species of wood: spruce, pine, larch, oak and meranti.
- The wood meets the RAL quality requirements according to DIN 68360.
- The moisture content of the wood is controlled and amounts to 13 +/- 2%.
- Wood is stored in regulated air humidity warehouse, which prevents cracking and other defects related to inadequate moisture content in the wood.

HARDWARE

- We install ROTO NX hardware in a silver colour with window trims in colour that matches the product surface.
- The certified load-bearing capacity of the standard installed hardware is 150 kg.
- The windows have acquired a RC2 safety class certificate.
- We also offer concealed hardware and hardware for various opening systems – rotating, tilting, sliding etc.

WEATHERSTRIP AND PROTECTIVE ALUMINIUM PROFILES

- The shape and colour match the design of the product.
- Optional installation of a thermal insulated weatherstrip profile.

GLAZING

- You can choose from a variety of thermal and acoustic insulated and safety glass.
- Glass is sealed with a permanent elastic sealant that matches the surface of the product in colour.
- A spacer between glass made from plastic material (TGI) or rustproof metal sheet further improves the thermal characteristics of the product.

We reserve the right to technical modifications or possible errors in the text and printing.

SURFACE TREATMENT

The surface treatment of products with environmentally-friendly protective coatings has a major impact on the durability, persistence and visual appearance of wood products. We at Inles have devoted special attention to this task and are proud of our robotized electrostatic final coating of wood products. You will surely find a shade to your taste from our wide range of colours.

THREE-LAYERED COATING SYSTEM

- The basic coating protects the wood from fungi and insects and evens the differences in the colour of wood.
- The intermediate layer seals the wood pores and ensures the uniform smoothness of the surface.
- The final robotized electrostatic coating enables the uniform application of a coating film on the entire surface of the product and consequently increases the durability of products and provides for a more sophisticated appearance.

CE

We are one of the first manufacturers of building furniture in Europe to have started to mark our wooden windows with the CE sign. The sign confirms that the products are manufactured in accordance with the European standards, that their manufacture is appropriately controlled and that the free movement of these products is ensured throughout the entire EU market.

Wood/ aluminium windows

WOOD/ ALUMINIUM WINDOWS

Wooden windows with aluminum cladding was certainly one of the biggest revolution in the production of external joinery. With such products you get all the positive characteristics of two completely different materials - wood and aluminum. Wood is a renewable natural material which bring into your home a touch of familiarity and creates a pleasant atmosphere with a naturale and homely feeling.

Resistant coating of aluminum on the outside protects the wood from weather conditions such as rain, sunlight, mechanical damage thus extend the life of the product.

INO - HA80

The image is symbolic.

Wood/ aluminium windows
INO-HA 80 MM

Aligned execution inside and outside.
The window is distinguished by modern design ...

Wood/ aluminium windows
INO-HA 80 MM

... and visual perfection, which emphasizes
version without glazing batten.

80 WOOD/ALUMINUM

Uf = 1,2 W/m²K
(soft wood)
Uw = 0,84 W/m²K
(Ug=0,5 W/m²K, TGI black)

INO-HA80-MM

Aligned execution of frame and casement, inside and outside. The window is distinguished by modern design and visual perfection, which emphasizes version without glazing batten.

GLAZING
Thermal insulated glass, Ug=0,5 W/m²K,
glazing thickness of 52 mm. TGI spacer black.

WOOD TYPE
Wood species: spruce, larch,
oak and meranti.

PERMANENT ELASTIC SEALS
Series-mounted highly elastic seals with soft cores
and guard backs and smooth surface, resistant to dirt.

HARDWARE
The installation of concealed hardware.

- two-coloured version interior-exterior
- powder-coated aluminium clads
- visible or hidden drainage
- concealed hardware
- low-energy product
- built-in three-layered insulation glass

WINDOWS

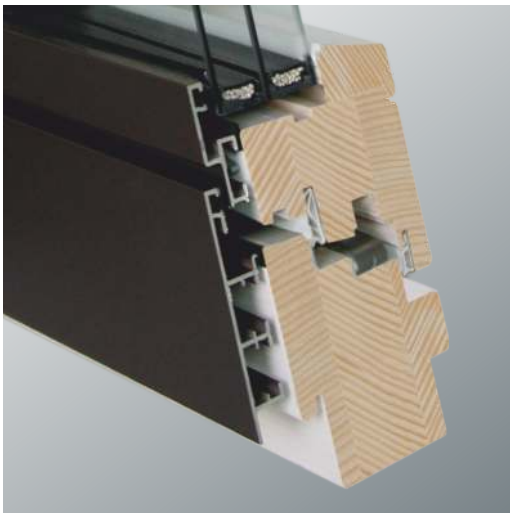

INO-HA80-ML

Aligned execution of frame and casement, inside and outside . The version with glazing batten.

GLAZING
Thermal insulated glass,Ug=0,5 W/m^{2}K.
TGI spacer black.

HARDWARE
The installation of concealed hardware..

We suggest you take windows INO-HA80-MM and INO-HA80-ML in combination with both sides aligned wood or wood/alu door Trend Alpha or alu door Althotherm ST95.

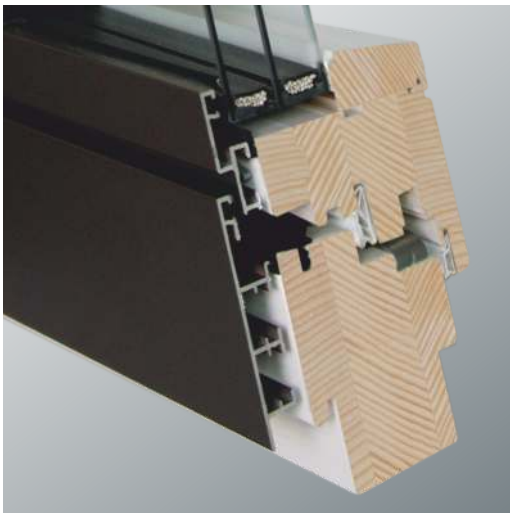

INO-HA80-F

Okno, ki ima na zunanji strani aluminij oblogo krila poravnano z oblogo okvirja.

GLAZING
Thermal insulated glass, Ug=0,5 W/m^{2}K..
TGI spacer black.

SILIKON
Trajnoelastična tesnilna masa barvno prilagojena površini izdelka.

HARDWARE
A high level of safety for the standard hardware with a load-bearing capacity of 150 kg.

- two-coloured version interior-exterior
- powder-coated aluminium clads
- visible or hidden drainage
- concealed hardware
- low-energy product
- built-in three-layered insulation glass

80 WOOD/ALUMINUM

INO-HA80

Wood / aluminum window with an elegant aluminum cladding. In addition to durability and color consistency, the aluminium cladding creates a worthy and a modern look of the product.

INO-HA80-S

INO-HAS wood / aluminum window with elegant, soft rounded lines in your ambience evokes a feeling of comfort and allows the product to fully comply with the outside of the building as well as the interior of your place.

ISO-HA 80

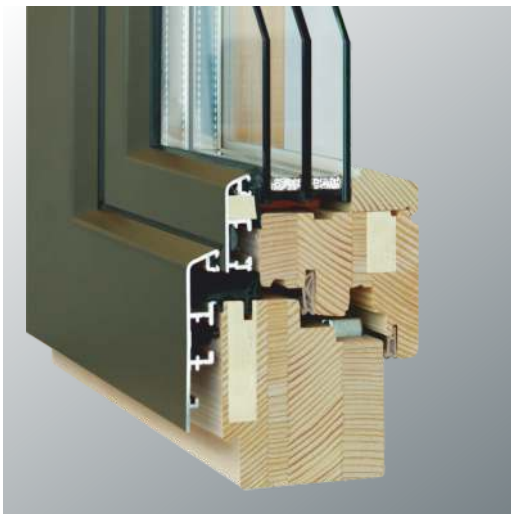

Wood windows with a wood profile thickness of 80 mm and an inserted core of PUR foam insulation are suitable for installation in high quality low-energy buildings.

Uf = 0,92 W/m²K
(soft wood)

Uw = 0,74 W/m²K
(Ug=0,5 W/m²K, TGI)

The insulation inserts provide excellent thermal characteristics without any impact on the external appearance of the product. Thermal transmittance of the profile according to the EN ISO 0077-2 is **Uf = 0,92 W/m²K**.

We reserve the right to technical modifications or possible errors in the text and printing.

WINDOWS

INO-HA80-B

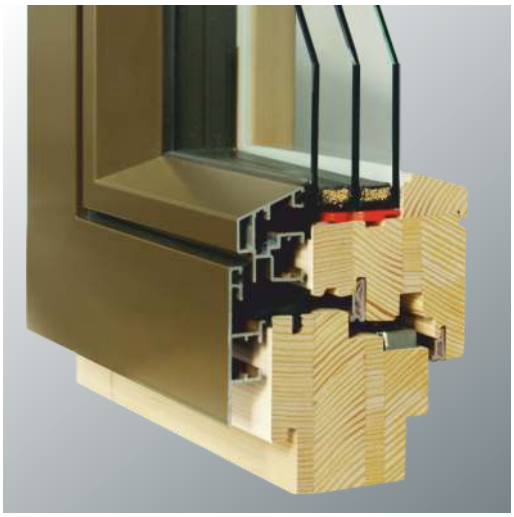

Three seals provides excellent sound insulation, especially when using special glass with acoustic insulation Rw 45 dB.

The image is symbolic.

WOOD PROFILES

- Wood frame profiles and casements with a thickness of 80 mm meet the constructional requirements of the DIN 68121 standard.
- The profiles are three layers of wood joined together using waterproof D4 adhesive according to the EN 204 and EN 143257 standards.
- You can choose from the following specious of wood: spruce, pine, larch, oak and meranti.
- The used wood meets the RAL quality requirements according to DIN 68360.
- The moisture content of the wood is controlled and amounts to 13 +/- 2%.

ALUMINUM CLADDING

- Available in various forms of aluminum clads.
- Joints of the aluminum clads are mechanically jointed or welded.
- Aluminum cladding is attached to wood with plastic clips which allows air circulation.

HARDWARE

- We install ROTO NX hardware in a silver colour.
- The certified load-bearing capacity of the standard installed hardware is 150 kg.
- We also offer concealed hardware and hardware for various opening systems – rotating, tilting, sliding etc.



GLAZING

- You can choose from a variety of thermal and acoustic insulated and safety glass.
- A spacer between glass made from plastic material (TGI) or rustproof metal sheet further improves the thermal characteristics of the product.

CE

We are one of the first manufacturers of building furniture in Europe to have started to mark our wooden windows with the CE sign. The sign confirms that the products are manufactured in accordance with the European standards, that their manufacture is appropriately controlled and that the free movement of these products is ensured throughout the entire EU market.

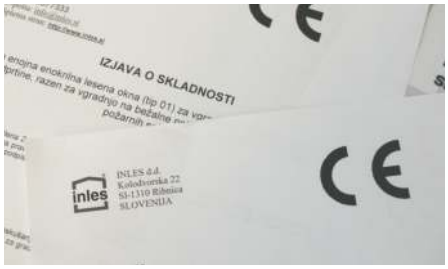

We reserve the right to technical modifications or possible errors in the text and printing.

SURFACE TREATMENT

- The surface treatment of products with environmentally-friendly protective coatings has a major impact on the durability, persistence and visual appearance of wood products. We at Inles have devoted special attention to this task and are proud of our robotized electrostatic final coating of wood products. You will surely find a shade to your taste from our wide range of colours.

- A powder-coated aluminum clads are environmentally friendly and provides excellent quality and durability of coloured surfaces.

Aluminium colours for wood / aluminum windows.

COEFFICIENT REVIEW THERMAL

WOOD WINDOW

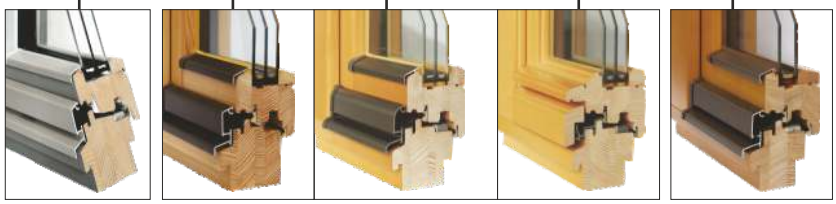

Glass Types with thermal transmission of heat flow U_g (W/m²K)	Glass Structure	Thickness (mm)	Sound Transmission Rating (Rw dB)	Energy Transmission Rating g (%)	INO-92	INO-80 INO-92/80	INO-80 Soft A INO-80 Soft B	INO-80 Stil A INO-80 Stil B INO-80 Standard B	INO-68
					U_f (W/m²K)				
					U_f= 0,98	U_f= 1,2	U_f= 1,2	U_f= 1,2	U_f= 1,5
Thermal insulating glass					U_w (W/m²K)				
					TGI	TGI	TGI	TGI	TGI
UNITOP 1.1	4/16/:4 Argon	24	32	65		1,2	1,2	1,2	1,3
UNITOP 1.0 ONE	4/16/:4 Argon One	24	32	52		1,2	1,2	1,2	1,3
Three-layer thermal insulating glass					U_w (W/m²K)				
					TGI	TGI	TGI	TGI	TGI
UNITOP 0,5	4:/18/4/18/:4 Argon	48	34	53	0,75				
UNITOP 0,5	4:/16/4/16/:4 Argon ONE	44	34	37	0,75	0,83	0,83	0,83	
UNITOP 0,6	4:/14/4/14/:4 Argon	40	32	53	0,82	0,89	0,89	0,89	
UNITOP 0,7	4:/10/4/12/:4 Argon One	34	32	37		0,96	0,96	0,96	1,1
UNITOP 0,7	4:/12/4/12/:4 Argon	36	32	53	0,88	0,96	0,96	0,96	1,1
Thermal and sound insulating glass					U_w (W/m²K)				
					TGI	TGI	TGI	TGI	TGI
UNIPHON 38/36 0,7	6:/12/4/12/:4 Argon	38	36	52	0,88	0,96	0,96	0,96	
UNIPHON 46/39 0,6	6:/16/4/16/:4 Argon	46	39	52	0,88				
Safety glass					U_w (W/m²K)				
					TGI	TGI	TGI	TGI	TGI
UNISAFE P4A (A3 besch.) 0,7	A3:/12/4/12/:4 Argon	42	37	48	0,88	0,96	0,96	0,96	

Thermal and Aucustic insulation of windows depend upon the size and style of the window.
Coefficient of thermal transmission Uw (W/m²K) is calculated for a 1230 x 1480 mm single sash window.
For wood and wood-aluminum clad windows conifer wood (such as pine, fir and larch) was used.

TRANSMISSION FOR WINDOWS **Uw**

Wärmedurchgangskoeffizient des Rahmens nach EN ISO 10077-2

WOOD-ALUMINUM WINDOW | VINYL and VINYL/ALUMINUM WINDOW | ALUMINUM WINDOW

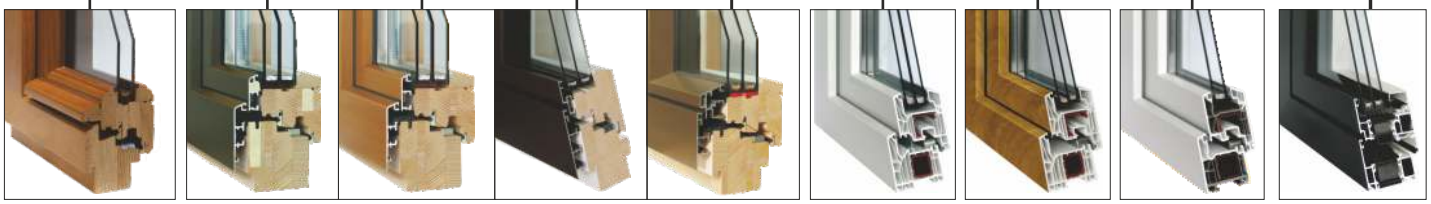

INO-68 Stil A INO-68 Stil B INO-68 Standard B	ISO-HA 80	INO-HA80	INO-HA80 MM INO-HA80 ML	INO-HA80 B INO-HA80 S INO-HA80 F	Liv**Ing** MD Liv**Ing** MD- Top Alu	Liv**Ing** AS Liv**Ing** AS- Top Alu	CT70 AS Classic CT70 AS Rondo CT70 AS Classic TA CT70 AS Rondo TA	AWS 75.SI+
Thermal transfer coefficient on frame window unit calculated according to EN ISO 10077-1								
U_f= 1,5	U_f= 0,92	U_f= 1,2	U_f= 1,2	U_f= 1,2	U_f= 1,0	U_f=1,1	U_f= 1,4	U_f= 1,3
Thermal transfer coefficient on complete window unit calculated according to EN ISO 10077-1								
TGI	TGI	TGI	TGI	TGI	TGI	TGI	TGI	TGI
1,3					1,2	1,2	1,3	1,3
1,3					1,1	1,1	1,2	1,2
Thermal transfer coefficient on complete window unit calculated according to EN ISO 10077-1								
TGI	TGI	TGI	TGI	TGI	TGI	TGI	TGI	TGI
	0,74	0,83	0,84	0,83	0,76	0,79		0,85
	0,74	0,83	0,84	0,83	0,76	0,79		0,85
	0,81	0,90	0,91	0,90	0,82	0,86	0,95	0,92
1,1					0,89	0,92	1,0	0,99
1,1					0,89	0,92	1,0	0,99
Thermal transfer coefficient on complete window unit calculated according to EN ISO 10077-1								
TGI	TGI	TGI	TGI	TGI	TGI	TGI	TGI	TGI
					0,89	0,92	1,0	0,99
	0,81	0,90	0,91	0,90	0,82	0,86		0,92
Thermal transfer coefficient on complete window unit calculated according to EN ISO 10077-1								
TGI	TGI	TGI	TGI	TGI	TGI	TGI	TGI	TGI
	0,87	0,97	0,97	0,97	0,89	0,92		0,99

Uw Thermal transfer coefficient on complete window
TGI Spacers between glass made of vinyl

We reserve the right to technical modifications or possible errors in the text and printing.

COLOUR CHART OF WOOD SURFACES

For wood and wood/aluminium windows and doors

The following wood species are available

spruce

pine

larch

oak

meranti

Glazes (visible wood species structure)

Spruce/pine

RF 200

RFI Ö1

RFI NE

RFI 1

RF/K 10

RFI 10

RF/K 11

RF/K 12

RF/K 19

RF/K 21

RF/K 22

RF/K 15

RF/K 16

RF/K 17

RF/K 26

RF/K 27

RF/K 25

Pine

RK 1

RK 2

RK 4

Basic

R G 1

Larch

RL 200

RL Ö1

RLI NE

RLI 1

RL 21

RL 22

RL 23

ENVIRONMENTALLY-FRIENDLY
We use environmentally-friendly Water-based coatings for our three-layered system of surface treatment.

The displayed and original colours can differ due to print. Ask for colour samples from your vendor prior to purchasing.

Oak

ALTHOLZ

NEW

ALTHOLZ WOOD DECOR

Available for two models: HT 100, HTA 100

Surface treatment: raw, oiled or basic

RE 200

RE Ö1

REI NE

REI 1

REI 10

RE 21

RE 22

M e r a n t i

RM 21

RM 22

RM 23

RM 24

RM 25

RM 30

RM 31

RM 32

According to the RAL colour chart

R D 21

R D 22

R D 25

R D 44

We reserve the right to technical modifications or possible errors in the text and printing.
A difference between the displayed colors in the brochure and actual colors of products can arise during printing.

COLOUR CHART OF ALUMINUM SURFACES, HANDLES

Colours of aluminium for wood and wood/aluminium windows and doors

MASTER COLLECTION
(finestruktur, metalic)

Night Grey
Feinstruktur Metallic

Cast Iron
Feinstruktur Metallic

Russet Copper
Feinstruktur Metallic

Brown
Feinstruktur Metallic

Artic Ice
Feinstruktur Metallic

Granit Nature
Feinstruktur Metallic

Volcanic Ash
Feinstruktur Metallic

Precious Sand
Feinstruktur Metallic

ANODIZING COLLECTION
(matt, metalic)

CARBON NIGHT
Matt Metallic

DARK COPPER
Matt Metallic

SIMPLY COPPER
Matt Metallic

ORIGINAL PLATINIUM
Matt Metallic

GSPED 0
Matt

GSPED 1
Matt

GSPED 4
Matt

NOBLE BRONZE
Matt Metallic

RAL FARBEN
(matt, finestruktur, metalic, glatt)

RAL 9016
Matt/ Feinstruktur

RAL 7035
Matt/ Feinstruktur

RAL 7004
Matt/ Feinstruktur

RAL 7016
Matt/ Feinstruktur

RAL 9006
Metallic glatt

RAL 9007
Metallic glatt

DB 703
Metallic glatt

DB 703
Metallic Feinstruktur

The displayed and original colours can differ due to print. Ask for colour samples from your vendor prior to purchasing.

Imitation in stone

Dekor Zement hell

Dekor Beton dunkel

New

Imitation in wood

Dekor Altholz (Stadelholz-1N)

Dekor Stadelholz grau

New

GS Stemeseder Imitation wood

IMITATION
IN WOOD

Douglas 7

Eiche dunkel

Kirsch 2

Kirsch 3

Golden Oak

Nuss 1

Wenge

Walnuss dunkel

WINDOW HANDLES

ROTOLINE

white | natursilber | titan mat | neusilber | messing mat | vollmessing poliert | mittel bronze | bronze | graubraun | with a lock

GIADA

vollmessing poliert

OGRO

stainless steel

TOULON balcony oor set

TOULON

aluminij - silver color | aluminum bronze color | aluminium - color steel | black mat | white | with a lock

TOULON sliding wall handle (typ 14)

TOULON sliding wall handle (typ 18)

with a lock | transition

We reserve the right to technical modifications or possible errors in the text and printing.
A difference between the displayed colors in the brochure and actual colors of products can arise during printing.

Front-mounted roller shutters

PENTO./.E	RONDO./.E	Q.INTEGO./.E

PENTO.X/.XE	RONDO.X/.XE	Q.INTEGO.X/.XE
S KOMARNIKOM		

Top-mounted roller shutters

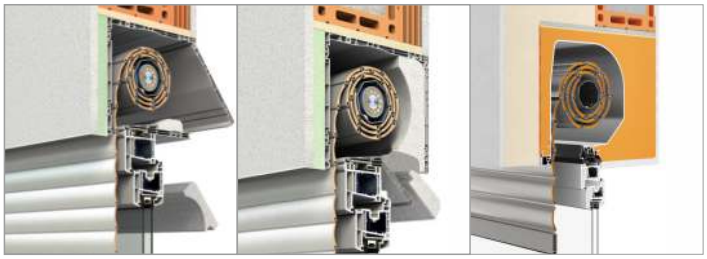

RA.2	RA.3	PURO2.XR

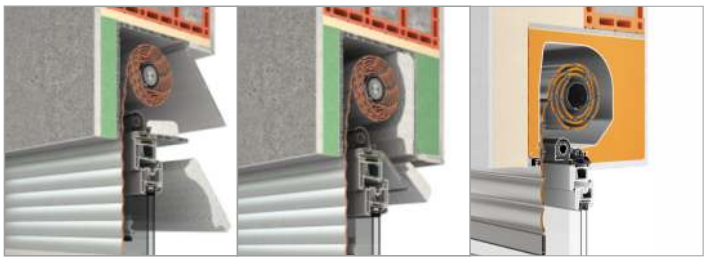

KARO	KARO	PURO2.XR with INSECT SCREEN
optional INSECT SCREEN		

We reserve the right to technical modifications or possible errors in the text and printing.

Insect screens

ROLLER	ROTATING FRAME

SASH FRAME	PLEATED SCREENS

HERO venetian blinds

FRONT-MOUNTED

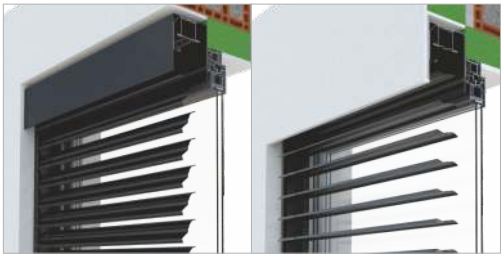

HERO.1 mounted visibly	HERO.1 mounted out of sight

FRONT-MOUNTED
with INSECT SCREEN

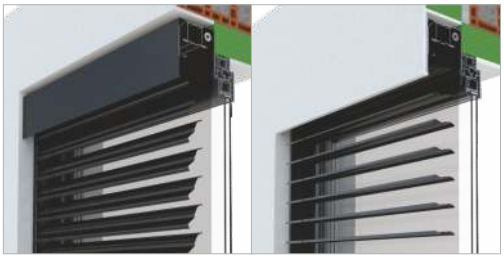

HERO.1X mounted visibly	HERO.1X mounted out of sight

TOP-MOUNTED, optional INSECT SCREEN

HERO.5 - PURO 2.XR
roller shutter housing

Textile screens

zipSCREEN.2,
Basis RONDO - mounted visibly

zipSCREEN.2,
Basis QUADRO - mounted visibly

zipSCREEN.2,
Basis INTEGO - mounted out of sight

We reserve the right to technical modifications or possible errors in the text and printing.

Wood shutters

Type 101/101A | Type 102 | Type 103

Type 104A | Type 104AF

Aluminium shutters

Type A101/A101A



Type A103 | Type A104F

French balcony

Velja za vse Inlesove okenske programe.

Handles with LED illumination

- round and square handles with integred led lighting

We reserve the right to technical modifications or possible errors in the text and printing.

Ventilation KZ42

Ventilation KZ36a

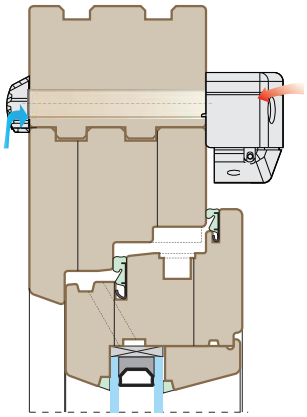

Ventilation KZ36b

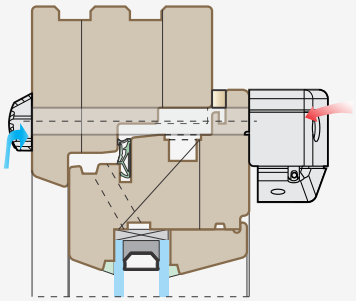

Ventilation Kz41

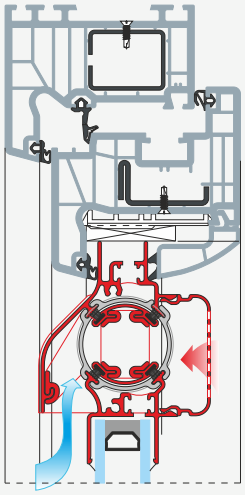

Ventilation REGEL-AIR KZ41a



Ventilation KZ35a

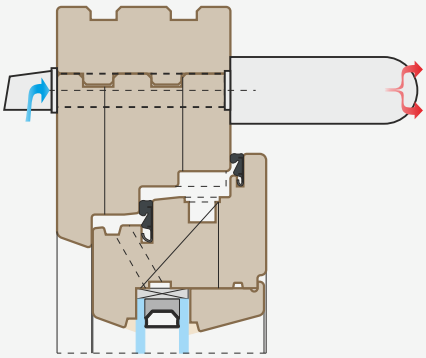

We reserve the right to technical modifications or possible errors in the text and printing.

Inles
Proizvodnja, trženje in inženiring d.d.

SI - 1310 Ribnica, Kolodvorska 22
tel.: 01 8377 100, fax: 01 8377 333
e-mail: info@inles.si

www.inles.net

DISTRIBUTOR

2023/01